

Warning

To avoid fire, shock, or death, turn the power off at the circuit breaks before wiring.


Quick Specs	
Input Voltage	120VAC
Output Voltage	24VDC
Dimming Type	TRIAC / ELV
Ambient Temp	-86°F - +104°F
Environment	Dry and damp location

Mounting the Driver

Select a suitable location that can provide adequate support for the weight of the driver. It is recommended to install the driver vertically for maximum heat dissipation. Install the driver in a well-ventilated area free from explosive gases and vapors. If you are installing more than one driver, keep at least a 6" distance between each driver.

Wire Connections

With the power switched off, connect the wires according to the wiring diagram below.

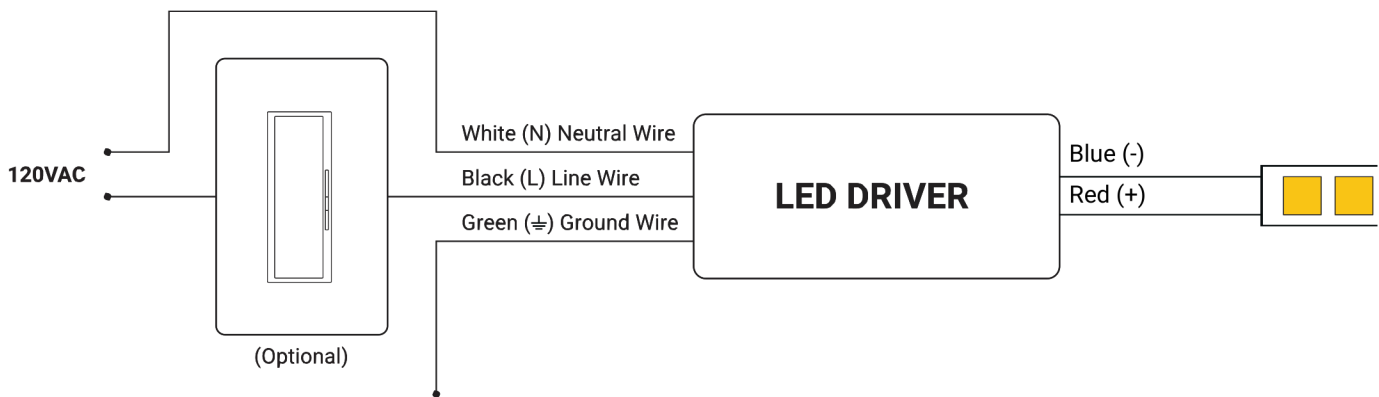

Need Support ?



216-727-3618



customer@enoled.com