

# Glow67 Pro Series

24VDC IP67 Dot-less High-Power LED Tape



## Glow67 Pro Series 24VDC IP67 Dot-less High-Power LED Tape




### Features

- Spec-grade for wet location installs
- Dot-free for smooth lighting
- High lumen: 753 lm per foot
- 90+ CRI for true color
- Plug-and-play connectors made for Glow67
- Slim, flexible, easy to install
- Cuttable every 1.04 inches
- Works with all dimming protocols
- 6-year warranty, UL/CE listed

### Specifications

#### Available Color Temperatures:



<b>Input voltage:</b>	24VDC
<b>CRI:</b>	90
<b>Power:</b>	5.8W/ft
<b>Lumens:</b>	753lm/ft
<b>Cut Length:</b>	1.04" (26.3mm)
<b>Environment:</b>	IP67
<b>Dimensions (W x H):</b>	0.47" x 0.18" (12 x 4.5mm)
<b>Beam Angle:</b>	150°
<b>Maximum run:</b>	25ft (145 Watts)
<b>Lamp Life:</b>	50,000 Hours
<b>Operating Temp:</b>	-4°F to 113°F (-20°C to 45°C)
<b>Adhesive:</b>	3M
<b>Warranty:</b>	5 years
<b>Dimming Control:</b>	• Incandescent • CFL/LED • MLV • ELV • 0-10V • Dimmer switch / wireless app & wall switch.

150° Beam Angle



### Included Accessories

#### Ordering Code

Glow67-TC-KIT Included in 16.4ft items



#### Description

1. Glow67-TT - 1pc
2. Glow67-TW - 1pc
3. Glow67-EC - 1pc
4. Glow67-WC - 1pc
5. Glow67-SS - 1 pc



### Connectors and Wire

Ordering Code	Description
1) Glow67-TT	0.47" (12mm) Tape to tape connector
2) Glow67-TW	0.47" (12mm) Tape to wire connector with a 11.8" lead wire
3) Glow67-EC	0.47" (12mm) End cap
4) Glow67-WC	0.47" (12mm) Wall Clip and Two Screws
5) Glow67-SS	Wet Location Silicone Sealant
6) WS-2P-15	15ft 2 Pin 15ft Wire Spool
7) WS-2P-250	250ft 2 Pin 250ft Wire Spool

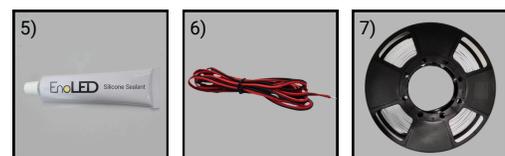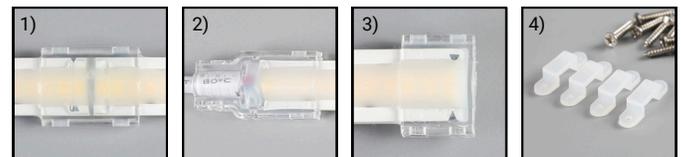

## Glow67 Pro Series 24VDC IP67 Dot-less High-Power LED Tape





### Performance Table

Ordering Code	Length	Voltage	CCT	CRI	Wattage	Lumens	Cuttable	IP Rating
<b>Glow67</b>								
Glow67-27-16	16.4ft	24VDC	2700K	90+	5.8W/ft	703lm/ft	1.04"	IP67
Glow67-30-16	16.4ft	24VDC	3000K	90+	5.8W/ft	723lm/ft	1.04"	IP67
Glow67-35-16	16.4ft	24VDC	3500K	90+	5.8W/ft	744lm/ft	1.04"	IP67
Glow67-40-16	16.4ft	24VDC	4000K	90+	5.8W/ft	753lm/ft	1.04"	IP67
Glow67-50-16	16.4ft	24VDC	5000K	90+	5.8W/ft	750m/ft	1.04"	IP67
Glow67-65-16	16.4ft	24VDC	6500K	90+	5.8W/ft	743lm/ft	1.04"	IP67
Glow67-27-164	164ft	24VDC	2700K	90+	5.8W/ft	703lm/ft	1.04"	IP67
Glow67-30-164	164ft	24VDC	3000K	90+	5.8W/ft	723lm/ft	1.04"	IP67
Glow67-35-164	164ft	24VDC	3500K	90+	5.8W/ft	744lm/ft	1.04"	IP67
Glow67-40-164	164ft	24VDC	4000K	90+	5.8W/ft	753lm/ft	1.04"	IP67
Glow67-50-164	164ft	24VDC	5000K	90+	5.8W/ft	750m/ft	1.04"	IP67
Glow67-65-164	164ft	24VDC	6500K	90+	5.8W/ft	743lm/ft	1.04"	IP67

Available with 30 days lead time

### Mechanical Diagrams

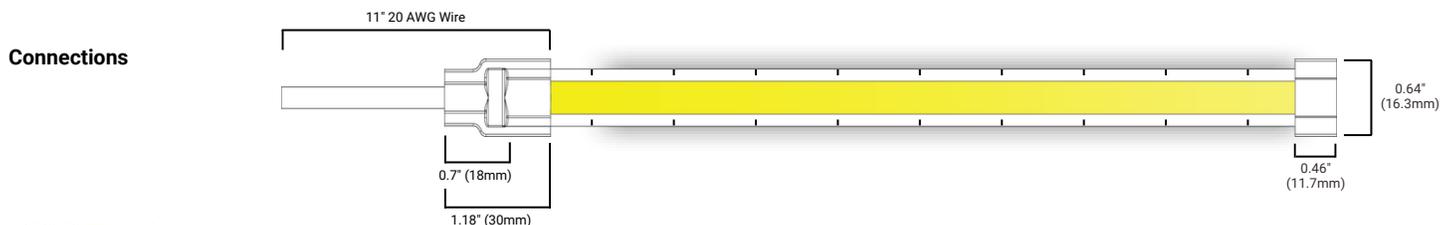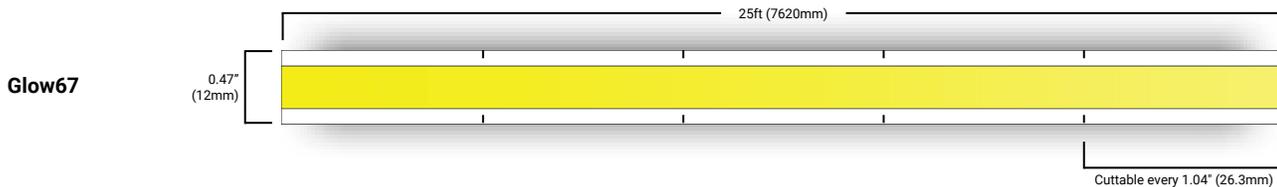

150° Beam Angle



# Glow67 Pro Series

## 24VDC IP67 Dot-less High-Power LED Tape



### Channel Compatibility


#### Surface Mount



**SL-103-S-94**  
**Aluminium Finish**  
 Width (outside): 0.59" (14.90mm)  
 Width (inside): 0.50" (12.70mm)  
 Height: 0.27" (6.86mm)  
 Length: 94" (2.38m)



**SL-118-S-94**  
**Aluminium Finish**  
 Width (outside): 0.66" (16.70mm)  
 Width (inside): 0.48" (12.30mm)  
 Height: 0.31" (8.00mm)  
 Length: 94" (2.38m)



**SL-118-B-94**  
**Black Finish**  
 Width (outside): 0.66" (16.70mm)  
 Width (inside): 0.48" (12.30mm)  
 Height: 0.31" (8.00mm)  
 Length: 94" (2.38m)



**SL-118-BB-94**  
**Black Finish**  
 Width (outside): 0.66" (16.70mm)  
 Width (inside): 0.48" (12.30mm)  
 Height: 0.31" (8.00mm)  
 Length: 94" (2.38m)




**SL-179-S-94**  
**Aluminium Finish**  
 Width (outside): 0.66" (16.70mm)  
 Width (inside): 0.48" (12.30mm)  
 Height: 0.60" (15.30mm)  
 Length: 94" (2.38m)




**SL-179-B-94**  
**Black Finish**  
 Width (outside): 0.66" (16.70mm)  
 Width (inside): 0.48" (12.30mm)  
 Height: 0.60" (15.30mm)  
 Length: 94" (2.38m)




**SL-179-BB-94**  
**Black Finish**  
 Width (outside): 0.66" (16.70mm)  
 Width (inside): 0.48" (12.30mm)  
 Height: 0.60" (15.30mm)  
 Length: 94" (2.38m)



**SL-430-S-94**  
**Aluminium Finish**  
 Width (outside): 0.93" (23.50mm)  
 Width (inside): 0.80" (20.30mm)  
 Height: 0.50" (12.80mm)  
 Length: 94" (2.38m)



**SL-454-S-94**  
**Aluminium Finish**  
 Width (outside): 0.93" (23.50mm)  
 Width (inside): 0.80" (20.30mm)  
 Height: 0.39" (12.80mm)  
 Length: 94" (2.38m)



**SL-454-B-94**  
**Aluminium Finish**  
 Width (outside): 0.93" (23.50mm)  
 Width (inside): 0.80" (20.30mm)  
 Height: 0.39" (12.80mm)  
 Length: 94" (2.38m)




**SL-314-S-94**  
**Aluminium Finish**  
 Width (outside): 0.80" (20.30mm)  
 Width (inside): 0.68" (17.50mm)  
 Height: 0.80" (20.30mm)  
 Length: 94" (2.38m)



**SL-331-S-94**  
**Aluminium Finish**  
 Width (outside): 1.14" (29.00mm)  
 Width (inside): 0.68" (17.50mm)  
 Height: 0.88" (22.35mm)  
 Length: 0.94" (2.44mm)



**SL-504-S-94**  
**Aluminium Finish**  
 Width (outside): 1.31" (33.20mm)  
 Width (inside): 1.18" (30.00mm)  
 Height: 0.57" (14.40mm)  
 Length: 94" (2.38m)



**SL-977-S-94**  
**Aluminium Finish**  
 Width (outside): 3.97" (100.90mm)  
 Width (inside): 3.60" (91.50mm)  
 Height: 1.48" (37.50mm)  
 Length: 94" (2.38m)




**SL-998-S-94**  
**Aluminium Finish**  
 Width (outside): 3.37" (85.50mm)  
 Width (inside): 3.00" (76.20mm)  
 Height: 1.43" (36.20mm)  
 Length: 94" (2.38m)



**SL-910-S-94**  
**Aluminium Finish**  
 Width (outside): 1.44" (36.70mm)  
 Width (inside): 1.18" (30.00mm)  
 Height: 1.44" (36.70mm)  
 Length: 94" (2.38m)



**SL-910-B-94**  
**Black Finish**  
 Width (outside): 1.44" (36.70mm)  
 Width (inside): 1.18" (30.00mm)  
 Height: 1.44" (36.70mm)  
 Length: 94" (2.38m)



**SL-928-S-94**  
**Aluminium Finish**  
 Width (outside): 1.97" (50.00mm)  
 Width (inside): 1.80" (45.72mm)  
 Height: 1.16" (29.50mm)  
 Length: 94" (2.38m)



**SL-928-B-94**  
**Black Finish**  
 Width (outside): 1.97" (50.00mm)  
 Width (inside): 1.80" (45.72mm)  
 Height: 1.16" (29.50mm)  
 Length: 94" (2.38m)

#### Corner LED Channel



**SL-214-S-94**  
**Aluminium Finish**  
 Width (outside): 0.64" (16.30mm)  
 Width (inside): 0.44" (11.00mm)  
 Height: 0.64" (16.30mm)  
 Length: 94" (2.38m)



**SL-267-S-94**  
**Aluminium Finish**  
 Width (outside): 0.69" (17.70mm)  
 Width (inside): 0.47" (12.10mm)  
 Height: 0.69" (17.70mm)  
 Length: 94" (2.38m)




**SL-511-S-94**  
**Aluminium Finish**  
 Width (outside): 1.18" (30mm)  
 Width (inside): 0.83" (21mm)  
 Height: 1.18" (30mm)  
 Length: 94" (2.38m)

## Glow67 Pro Series 24VDC IP67 Dot-less High-Power LED Tape




### Channel Compatibility


#### Recessed Mount



**RL-601-S-94**  
Aluminium Finish  
Width (outside): 0.91" (23.00mm)  
Width (inside): 0.48" (12.30mm)  
Height: 0.31" (8.00mm)  
Length: 94" (2.38m)




**RL-601-B-94**  
Aluminium Finish  
Width (outside): 0.91" (23.00mm)  
Width (inside): 0.48" (12.30mm)  
Height: 0.31" (8.00mm)  
Length: 94" (2.38m)



**RL-601-BB-94**  
Aluminium Finish  
Width (outside): 0.91" (23.00mm)  
Width (inside): 0.48" (12.30mm)  
Height: 0.31" (8.00mm)  
Length: 94" (2.38m)




**RL-615-S-94**  
Aluminium Finish  
Width (outside): 0.91" (23.00mm)  
Width (inside): 0.48" (12.30mm)  
Height: 0.57" (14.50mm)  
Length: 94" (2.38m)




**RL-727-S-94**  
Aluminium Finish  
Width (outside): 1.20" (30.60mm)  
Width (inside): 0.80" (20.30mm)  
Height: 0.50" (12.80mm)  
Length: 94" (2.38m)




**RL-778-S-94**  
Aluminium Finish  
Width (outside): 1.31" (33.20mm)  
Width (inside): 1.18" (30.00mm)  
Height: 0.57" (14.40mm)  
Length: 94" (2.38m)




**RL-809-S-94**  
Aluminium Finish  
Width (outside): 1.43" (36.30mm)  
Width (inside): 1.30" (33.10mm)  
Height: 1.38" (35.00mm)  
Length: 94" (2.38m)



**RL-851-S-94**  
Aluminium Finish  
Width (outside): 2.52" (64.00mm)  
Width (inside): 1.57" (40.00mm)  
Height: 1.16" (29.50mm)  
Length: 94" (2.38m)



**RL-977-S-94**  
Aluminium Finish  
Width (outside): 4.44" (112.8mm)  
Width (inside): 3.60" (91.50mm)  
Height: 1.48" (37.50mm)  
Length: 94" (2.38m)



**RL-873-S-94**  
Aluminium Finish  
Width (outside): 3.83" (97.40mm)  
Width (inside): 3.00" (76.20mm)  
Height: 1.43" (36.40mm)  
Length: 94" (2.38m)

#### Trimless Mud-In



**TL-029-S-94**  
Aluminium Finish  
Width (outside): 0.66" (16.70mm)  
Width (inside): 0.48" (12.30mm)  
Height: 0.61" (15.50mm)  
Length: 94" (2.38m)




**TL-041-S-94**  
Aluminium Finish  
Width (outside): 0.93" (23.50mm)  
Width (inside): 0.80" (20.50mm)  
Height: 0.61" (15.50mm)  
Length: 94" (2.38m)



**TL-066-S-94**  
Aluminium Finish  
Width (outside): 1.44" (36.70mm)  
Width (inside): 1.18" (30.00mm)  
Height: 0.61" (15.50mm)  
Length: 94" (2.38m)



**TL-071-S-94**  
Aluminium Finish  
Width (outside): 1.97" (50.00mm)  
Width (inside): 1.77" (45.00mm)  
Height: 0.61" (15.50mm)  
Length: 94" (2.38m)



**TL-301-S-94**  
Aluminium Finish  
Width (outside): 0.61" (15.50mm)  
Width (inside): 0.48" (12.30mm)  
Height: 4.68" (119mm)  
Length: 94" (2.38m)



**TL-401-S-94**  
Aluminium Finish  
Width (outside): 0.73" (18.50mm)  
Width (inside): 0.48" (12.30mm)  
Height: 3.80" (96.50mm)  
Length: 94" (2.38m)



**TL-539-S-94**  
Aluminium Finish  
Width (outside): 1.70" (43.30mm)  
Width (inside): 0.59" (15mm)  
Height: 3.94" (100.2mm)  
Length: 94" (2.38m)

## Glow67 Pro Series 24VDC IP67 Dot-less High-Power LED Tape



### Recommended 24V LED Drivers

#### Phase Cut Dimmable (Incandescent / CLF / LED / MLV / ELV)

##### XRD Dimmable LED Driver Series



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
XRD-40W-24VDC	120VAC	24VDC	40W	Yes	IP21	6.20" x 1.85" x 1.35"
XRD-60W-24VDC	120VAC	24VDC	60W	Yes	IP21	6.20" x 1.85" x 1.35"
XRD-75W-24VDC	120VAC	24VDC	75W	Yes	IP21	6.20" x 1.85" x 1.35"
XRD-96W-24VDC	120VAC	24VDC	96W	Yes	IP21	6.20" x 1.85" x 1.35"

##### MX1 High Power Dimmable LED Driver Series



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
MX1-150W-24VDC	120VAC	24VDC	150W	Yes	IP65	6.57" x 3.85" x 1.64"
MX1-200W-24VDC	120VAC	24VDC	200W	Yes	IP65	6.57" x 3.85" x 1.64"

##### MX2 Multi-Output Dimmable LED Driver Series



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
MX2-192W-24VDC	120VAC	24VDC	96W x 2	Yes	IP65	7.79" x 3.22" x 1.64"
MX2-288W-24VDC	120VAC	24VDC	96W x 3	Yes	IP65	10.98" x 3.22" x 1.64"

##### MRD Dimmable LED Driver Series



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
MRD-40W-24VDC	120VAC	24VDC	40W	Yes	IP21	3.31" x 1.57" x 0.98"
MRD-60W-24VDC	120VAC	24VDC	60W	Yes	IP21	3.31" x 1.57" x 0.98"
MRD-75W-24VDC	120VAC	24VDC	75W	Yes	IP21	3.31" x 1.57" x 0.98"
MRD-96W-24VDC	120VAC	24VDC	96W	Yes	IP21	3.31" x 1.57" x 0.98"

#### 0-10V Dimmable

##### NanoDrive 0-10V Dimmable LED Driver Series



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
NANO-40W-24VDC	120-277VAC	24VDC	40W	Yes	IP54	10.35" x 2.55" x 1.53"
NANO-60W-24VDC	120-277VAC	24VDC	60W	Yes	IP54	10.35" x 2.55" x 1.53"
NANO-96W-24VDC	120-277VAC	24VDC	96W	Yes	IP54	10.35" x 2.55" x 1.53"

#### Non-Dimmable

##### ELD Plug-in Series



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
ELD-60W-24VDC-UL	120VAC	24VDC	60W	Yes	IP65	8" x 2.4" x 0.78"
ELD-100W-24VDC-UL	120VAC	24VDC	100W	Yes	IP65	8" x 2.4" x 0.78"
ELD-150W-24VDC-UL	120VAC	24VDC	150W	Yes	IP65	9.3" x 2.48" x 1.25"
ELD-200W-24VDC-UL	120VAC	24VDC	200W	Yes	IP65	9.3" x 2.48" x 1.25"