

## CCTPlus

24VDC Flexible LED Strip  
Tunable White Series



Warm White

Cool White

## CCTPlus

### 24VDC Flexible LED Strip Tunable White Series



#### Features

- Tunable White 2700K + 6500K
- 3W Max per foot with the **Cyan** Controller (6W total for two channels)
- Up to 300Lm per foot
- Cuttable every 3.93in (100mm)
- UL Listed Class 2 Certified
- 90+ CRI (White LED's)
- 6-Year warranty

#### Specifications

Color Temperatures:





#### Dimensions

Dimensions	Length
Total Length	16.4 ft (5000mm)
Cut Length	3.93 Inch (100mm)
Width	0.39 Inch (10mm)
Height	0.083 Inch (2.1mm)
Input Cable Length	8 Inch (200mm)

#### Connectors and Wire

Ordering Code	Description
1) CCT-3P-TT-10	0.39" (10mm) Tape to Tape connector
2) CCT-3P-TW-72W-10	0.39" (10mm) Tape to Wire with 72" wire

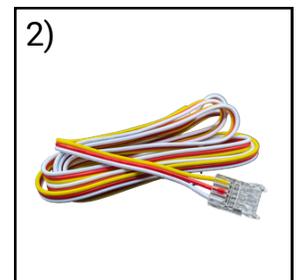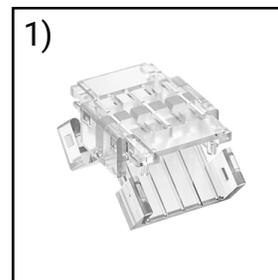

Specifications	Description
Ordering Code:	CCTPlus-16
Input Voltage:	24VDC
Color Temperature:	CCT Tunable (2700K + 6500K)
CRI:	90+ Ra
Power:	3W/ft (6W/ft for two channels)
Lumens:	300Lm/ft
Cut Length:	3.93 Inch (100mm)
Environment:	IP20 (non-waterproof)
Dimensions (W x H x L):	0.39" x 0.083" x 196.85"
Maximum Run:	32 ft (9700mm)
Beam Angle:	120°
Lamp Life:	50,000 hours
Max Ambient Temperature:	113°F
Adhesive:	3M

180° Beam Angle



## CCTPlus


### 24VDC Flexible LED Strip Tunable White Series



#### Photometric and Power Data

LED Channel	Voltage	Watts/ft	Lumens/ft	CCT	CRI	Wavelength
Warm White	24.0	3	300	2700K	90	-
Cool White	24.0	3	300	6500K	90	-

#### Wiring Diagram

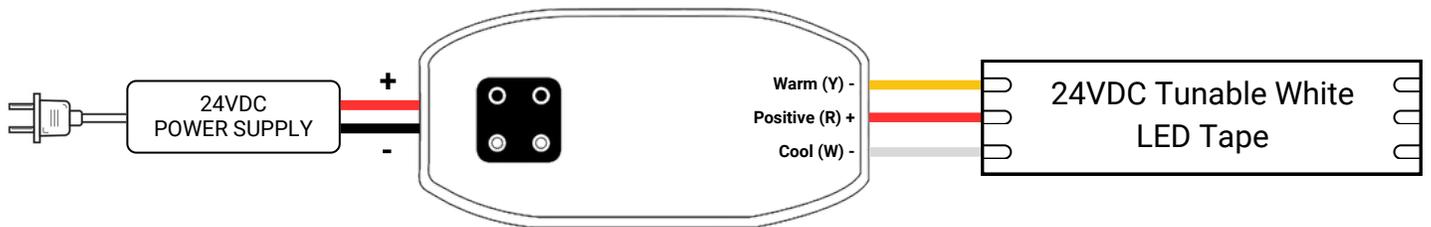

## CCTPlus

### 24VDC Flexible LED Strip Tunable White Series



## Channel Compatibility


### Surface Mount



**SL-103-S-94**  
**Aluminium Finish**  
 Width (outside): 0.59" (14.90mm)  
 Width (inside): 0.50" (12.70mm)  
 Height: 0.27" (6.86mm)  
 Length: 94" (2.38m)



**SL-118-S-94**  
**Aluminium Finish**  
 Width (outside): 0.66" (16.70mm)  
 Width (inside): 0.48" (12.30mm)  
 Height: 0.31" (8.00mm)  
 Length: 94" (2.38m)



**SL-118-B-94**  
**Black Finish**  
 Width (outside): 0.66" (16.70mm)  
 Width (inside): 0.48" (12.30mm)  
 Height: 0.31" (8.00mm)  
 Length: 94" (2.38m)




**SL-118-BB-94**  
**Black Finish**  
 Width (outside): 0.66" (16.70mm)  
 Width (inside): 0.48" (12.30mm)  
 Height: 0.31" (8.00mm)  
 Length: 94" (2.38m)




**SL-179-S-94**  
**Aluminium Finish**  
 Width (outside): 0.66" (16.70mm)  
 Width (inside): 0.48" (12.30mm)  
 Height: 0.60" (15.30mm)  
 Length: 94" (2.38m)



**SL-179-B-94**  
**Black Finish**  
 Width (outside): 0.66" (16.70mm)  
 Width (inside): 0.48" (12.30mm)  
 Height: 0.60" (15.30mm)  
 Length: 94" (2.38m)



**SL-430-S-94**  
**Aluminium Finish**  
 Width (outside): 0.93" (23.50mm)  
 Width (inside): 0.80" (20.30mm)  
 Height: 0.50" (12.80mm)  
 Length: 94" (2.38m)



**SL-454-S-94**  
**Aluminium Finish**  
 Width (outside): 0.93" (23.50mm)  
 Width (inside): 0.80" (20.30mm)  
 Height: 0.39" (12.80mm)  
 Length: 94" (2.38m)




**SL-314-S-94**  
**Aluminium Finish**  
 Width (outside): 0.80" (20.30mm)  
 Width (inside): 0.68" (17.50mm)  
 Height: 0.80" (20.30mm)  
 Length: 94" (2.38m)




**SL-331-S-94**  
**Aluminium Finish**  
 Width (outside): 1.14" (29.00mm)  
 Width (inside): 0.68" (17.50mm)  
 Height: 0.88" (22.35mm)  
 Length: 0.94" (2.44mm)




**SL-504-S-94**  
**Aluminium Finish**  
 Width (outside): 1.31" (33.20mm)  
 Width (inside): 1.18" (30.00mm)  
 Height: 0.57" (14.40mm)  
 Length: 94" (2.38m)




**SL-910-S-94**  
**Aluminium Finish**  
 Width (outside): 1.44" (36.70mm)  
 Width (inside): 1.18" (30.00mm)  
 Height: 1.44" (36.70mm)  
 Length: 94" (2.38m)



**SL-910-B-94**  
**Black Finish**  
 Width (outside): 1.44" (36.70mm)  
 Width (inside): 1.18" (30.00mm)  
 Height: 1.44" (36.70mm)  
 Length: 94" (2.38m)



**SL-928-S-94**  
**Aluminium Finish**  
 Width (outside): 1.97" (50.00mm)  
 Width (inside): 1.80" (45.72mm)  
 Height: 1.16" (29.50mm)  
 Length: 94" (2.38m)



**SL-928-B-94**  
**Black Finish**  
 Width (outside): 1.97" (50.00mm)  
 Width (inside): 1.80" (45.72mm)  
 Height: 1.16" (29.50mm)  
 Length: 94" (2.38m)

### Corner LED Channel




**SL-214-S-94**  
**Aluminium Finish**  
 Width (outside): 0.64" (16.30mm)  
 Width (inside): 0.44" (11.00mm)  
 Height: 0.64" (16.30mm)  
 Length: 94" (2.38m)



**SL-267-S-94**  
**Aluminium Finish**  
 Width (outside): 0.69" (17.70mm)  
 Width (inside): 0.47" (12.10mm)  
 Height: 0.69" (17.70mm)  
 Length: 94" (2.38m)


### Recessed Mount



**RL-601-S-94**  
**Aluminium Finish**  
 Width (outside): 0.91" (23.00mm)  
 Width (inside): 0.48" (12.30mm)  
 Height: 0.31" (8.00mm)  
 Length: 94" (2.38m)




**RL-615-S-94**  
**Aluminium Finish**  
 Width (outside): 0.91" (23.00mm)  
 Width (inside): 0.48" (12.30mm)  
 Height: 0.57" (14.50mm)  
 Length: 94" (2.38m)




**RL-727-S-94**  
**Aluminium Finish**  
 Width (outside): 1.20" (30.60mm)  
 Width (inside): 0.80" (20.30mm)  
 Height: 0.50" (12.80mm)  
 Length: 94" (2.38m)



**RL-778-S-94**  
**Aluminium Finish**  
 Width (outside): 1.31" (33.20mm)  
 Width (inside): 1.18" (30.00mm)  
 Height: 0.57" (14.40mm)  
 Length: 94" (2.38m)



**RL-809-S-94**  
**Aluminium Finish**  
 Width (outside): 1.43" (36.30mm)  
 Width (inside): 1.30" (33.10mm)  
 Height: 1.38" (35.00mm)  
 Length: 94" (2.38m)



**RL-851-S-94**  
**Aluminium Finish**  
 Width (outside): 2.52" (64.00mm)  
 Width (inside): 1.57" (40.00mm)  
 Height: 1.16" (29.50mm)  
 Length: 94" (2.38m)

### Trimless Mud-In



**TL-041-S-94**  
**Aluminium Finish**  
 Width (outside): 0.93" (23.50mm)  
 Width (inside): 0.80" (20.50mm)  
 Height: 0.61" (15.50mm)  
 Length: 94" (2.38m)



**TL-066-S-94**  
**Aluminium Finish**  
 Width (outside): 1.44" (36.70mm)  
 Width (inside): 1.18" (30.00mm)  
 Height: 0.61" (15.50mm)  
 Length: 94" (2.38m)



**TL-071-S-94**  
**Aluminium Finish**  
 Width (outside): 1.97" (50.00mm)  
 Width (inside): 1.77" (45.00mm)  
 Height: 0.61" (15.50mm)  
 Length: 94" (2.38m)

## CCTPlus

### 24VDC Flexible LED Strip Tunable White Series



#### Recommended 24V LED Drivers

#### Phase Cut Dimmable (Incandescent / CLF / LED / MLV / ELV)

##### XRD Series - Phase Cut Dimmable with Built-In J-box



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
XRD-40W-24VDC	120VAC	24VDC	40W	Yes	IP21	6.20" x 1.85" x 1.35"
XRD-60W-24VDC	120VAC	24VDC	60W	Yes	IP21	6.20" x 1.85" x 1.35"
XRD-75W-24VDC	120VAC	24VDC	75W	Yes	IP21	6.20" x 1.85" x 1.35"
XRD-96W-24VDC	120VAC	24VDC	96W	Yes	IP21	6.20" x 1.85" x 1.35"

##### MX1 Series - High Power, Phase Cut Dimmable



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
MX1-150W-24VDC	120VAC	24VDC	150W	Yes	IP65	6.57" x 3.85" x 1.64"
MX1-200W-24VDC	120VAC	24VDC	200W	Yes	IP65	6.57" x 3.85" x 1.64"
MX1-300W-24VDC	120VAC	24VDC	300W	Yes	IP65	6.57" x 3.85" x 1.64"

##### MX2 Series - Multi Output, Class 2, Phase Cut Dimmable



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
MX2-192W-24VDC	120VAC	24VDC	96W x 2	Yes	IP65	7.79" x 3.22" x 1.64"
MX2-288W-24VDC	120VAC	24VDC	96W x 3	Yes	IP65	10.98" x 3.22" x 1.64"

##### MRD Series - Phase Cut Dimmable Series



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
MRD-40W-24VDC	120VAC	24VDC	40W	Yes	IP21	3.31" x 1.57" x 0.98"
MRD-60W-24VDC	120VAC	24VDC	60W	Yes	IP21	3.31" x 1.57" x 0.98"
MRD-75W-24VDC	120VAC	24VDC	75W	Yes	IP21	3.31" x 1.57" x 0.98"
MRD-96W-24VDC	120VAC	24VDC	96W	Yes	IP21	3.31" x 1.57" x 0.98"

##### ProDrive Series - Low Profile 5-in-1 Dimmable Series



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
ProDrive-40W-24DC	120-277VAC	24VDC	40W	Yes	IP21	6.29" x 2.28" x 0.78"
ProDrive-60W-24DC	120-277VAC	24VDC	60W	Yes	IP21	7.28" x 2.5" x 0.86"
ProDrive-96W-24DC	120-277VAC	24VDC	96W	Yes	IP21	7.28" x 2.5" x 0.86"

## CCTPlus

### 24VDC Flexible LED Strip Tunable White Series



#### Recommended 24V LED Drivers

##### 0-10V Dimmable

##### NanoDrive 0-10V Dimmable LED Driver Series



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
NANO-40W-24VDC	120-277VAC	24VDC	40W	Yes	IP65	1.97" x 1.45" x 8.77"
NANO-60W-24VDC	120-277VAC	24VDC	60W	Yes	IP65	1.97" x 1.45" x 8.77"
NANO-96W-24VDC	120-277VAC	24VDC	96W	Yes	IP65	1.97" x 1.45" x 8.77"

##### Non-Dimmable

##### ELD - IP65 Non-Dim Series - Plug-in Version



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
ELD-100W-24VDC-UL-PLUG	120VAC	24VDC	100W	Yes	IP65	8" x 2.4" x 0.78"
ELD-200W-24VDC-UL-PLUG	120VAC	24VDC	200W	Yes	IP65	9.3" x 2.48" x 1.25"
ELD-300W-24VDC-UL-PLUG	120VAC	24VDC	300W	Yes	IP65	8.97" x 2.83" x 1.25"

##### ELD - IP65 Non-Dim Series - Direct Wire Version



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
ELD-100W-24VDC-UL	120VAC	24VDC	100W	Yes	IP65	8" x 2.4" x 0.78"
ELD-200W-24VDC-UL	120VAC	24VDC	200W	Yes	IP65	9.3" x 2.48" x 1.25"
ELD-300W-24VDC-UL	120VAC	24VDC	300W	Yes	IP65	8.97" x 2.83" x 1.25"