

MX2 Series

Multi-Output Class 2 Phase Cut Dimmable J-Box LED Driver



Features

- New Compact Design
- Multi-Channel UL listed Class 2
- Dimmable with any Incandescent/CLF/LED/MLV/ELV (leading or trailing edge) dimmer switch
- Dim down to 0.1%
- No minimum load required
- Can be fully loaded without derating
- IP65 rated for dry and wet locations
- Built-in junction box with multiple 3/8" knock-outs
- 6-year warranty

Specifications

Input	MX2-192W-24DC
Input Voltage Range:	120VAC +/- 5%
Input Frequency:	50-60Hz
Input Current:	1.86A max
Efficiency:	88%

Output

Output Voltage:	24VDC
Maximum Load:	96W x 2 Channel
Output Current @ Max Load:	4A x 2 Channel


Enclosure

Dimensions:	7.79" x 3.22" x 1.64"
Material:	Aluminum
Finish:	Black Powder Coat
Connection type:	Lead Wire / J-box
Weight:	1.76lbs

Dimming


Dimming Protocol:	Incandescent/CLF/LED/MLV/ELV
Min. Dimming Level:	0.1%
Dim to Off:	Yes
Dimming Curve:	Linear

Mechanical Overview

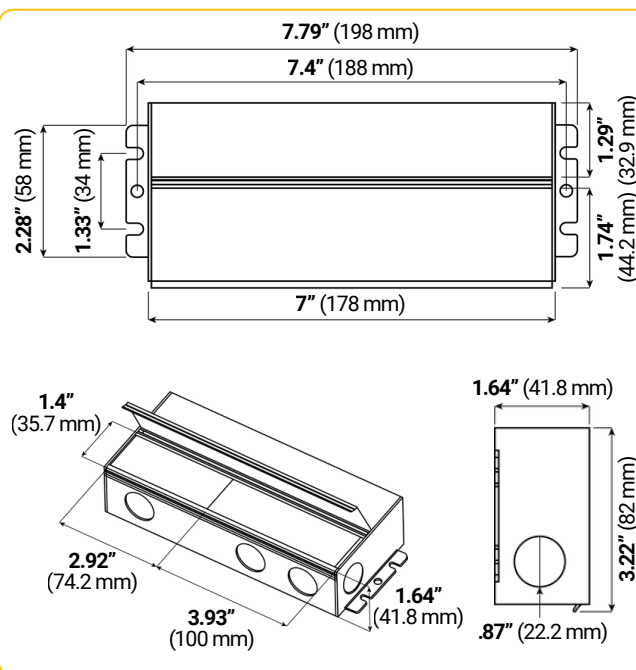

Wiring Diagrams

ELV

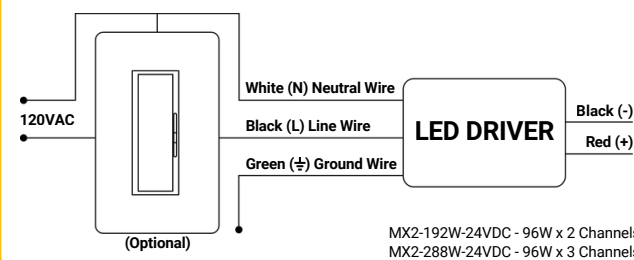

TRIAC / MLV

