Dim-to-Warm COB

24VDC Performance COB LED Tape Light

24V | IP20 | 1.97" (50mm) | c UL us LISTED

Features

- Smoothly warms from 3000K to 1800K as it dims
- Soft, uniform COB illumination
- 90+ CRI (color rendering index)
- 320 lumens per foot at 3000K
- Simple two-wire dimming with a compatible PWM-output LED driver
- Thin, flexible design for low-clearance areas
- Cuttable every 1.97” (50 mm)
- 3M adhesive backing

Accessories (Included only with the 16ft tape)

Ordering Code
ENO-SC-TKIT-10

Description

1. 72" Wire to Tape screw connector 0.39” (10mm)
2. Tape to Tape screw connector 0.39” (10mm)





Specifications

Input voltage:	24VDC
CRI:	90+
Power:	4.27W/ft
Lumens:	Up to 320 lm/ft
Cut Length:	1.97” (50 mm)
Environment:	IP20
Dimensions (W x H):	0.39” × 0.06” (10mm × 1.5mm)
Beam Angle:	150°
Maximum run:	32.8ft (140W)
Lamp Life:	50,000 Hours
Operating Temp:	-4°F to 113°F (-20°C to 45°C)
Adhesive:	3M
Warranty:	6 years
Dimming Control:	• Incandescent • CFL/LED • MLV • ELV • 0-10V • Dimmer switch / wireless app & wall switch


Connectors and Wire

Ordering Code	
ENO-SC-TT-10	0.39” (10mm) Tape to tape screw connectors
ENO-SC-TW-10	0.39” (10mm) Tape to wire screw connectors
ENO-SC-LL-10	0.39” (10mm) L Shape 90° screw connectors
ENO-SC-TW-72W-10	0.39” (10mm) Tape to wire screw connectors with a 72" lead wire
WS-2P-15	2 Pin 15ft Wire Spool
WS-2P-250	2 Pin 250ft Wire Spool

Ordering Code	Length
WarmDim-16	16.4 ft.
WarmDim-100	100 ft.

Mechanical Diagrams



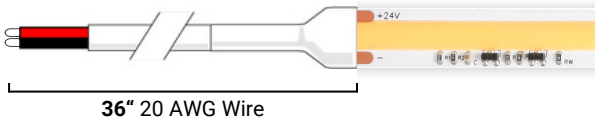

Ver. 110126