MicroSeries

24V, 5mm, Cut any Length COB LED Tape

c UL us LISTED




MicroSeries

24V, 5mm, Cut any Length COB LED Tape

c UL us LISTED

Features

- 5mm ultra-thin tape for cabinetry and tight spaces
- Cut to any length with no fixed segment spacing, enabling precise fit and seamless integration for custom installations
- Uniform illumination ideal for low-clearance areas
- 90+ CRI (color rendering index)
- Up to 190 lumens per foot
- Dimming options: Incandescent, CLF, LED, MLV, ELV, 0-10V, dimmer switch / wireless app & wall switch
- Red 3M VHB adhesive backing
- Available in 16ft and 100ft reels

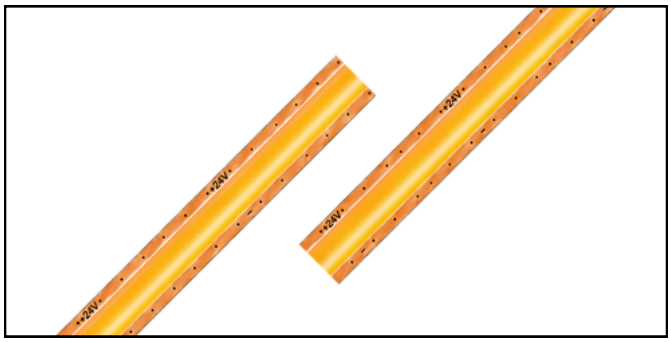


Specifications

Available Color Temperatures:

3000K 4000K

Input voltage:	24VDC
CRI:	90+
Power:	1.9W/ft
Lumens:	Up to 190lm/ft
Cut Length:	Any Length
Environment:	IP20
Dimensions (W x H):	0.20” x 0.06” (5mm x 1.6mm)
Beam Angle:	145°
Maximum run:	32.8ft (62.32 Watts)
Lamp Life:	50,000 Hours
Adhesive:	3M
Warranty:	6 years
Dimming Control:	• Incandescent • CFL/LED • MLV • ELV • 0-10V

145° Beam Angle



Accessories (Included only with the 16ft tape)

Ordering Code
ENO-SC-TKIT-5

Description
1. Tape to Wire Connector with 72” Power Feed
2. Tape to tape connector



Connectors and Wire

Ordering Code	Description
1) ENO-SC-TT-5-P5	Tape to Tape connector
2) ENO-SC-TW-5-P5	Tape to Wire connector
3) ENO-SC-TW-72W-5	Tape to Wire Connector with 72” Power Feed
4) ENO-SC-LL-5-P5	Tape to Tape L Shape 90° Connector

1)



2)



3)

4)



MicroSeries


24V, 5mm, Cut any Length COB LED Tape

Performance Table


Ordering Code	Length	Max Run Length	Voltage	CCT	CRI	Wattage	Lumens	Cuttable	IP Rating
Micro Series									
Micro-30-16	16.4ft	32.8ft	24VDC	3000K	90+	1.9W/ft	180lm/ft	Any Length	IP20
Micro-40-16	16.4ft	32.8ft	24VDC	4000K	90+	1.9W/ft	190lm/ft	Any Length	IP20
Micro-30-100	100ft	32.8ft	24VDC	3000K	90+	1.9W/ft	180lm/ft	Any Length	IP20
Micro-40-100	100ft	32.8ft	24VDC	4000K	90+	1.9W/ft	190lm/ft	Any Length	IP20

Mechanical Diagrams


Cut at any length



Connections

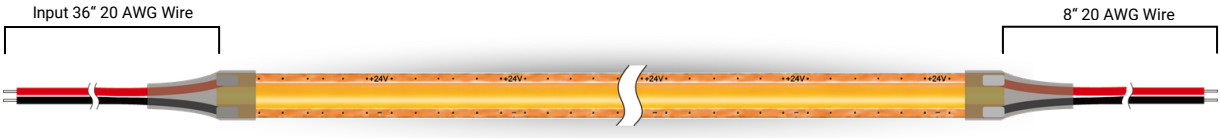

145° Beam Angle



MicroSeries


24V, 5mm, Cut any Length COB LED Tape


Spectrum Test Report

Test Condition

Temperature	WL Range Test	Mode	RH	IP	T	Sensitivity
25.3 ℃	350nm-1000nm	Fast Test	65.0%	39000 (60%)	250 ms	High

Spectrum Test Condition

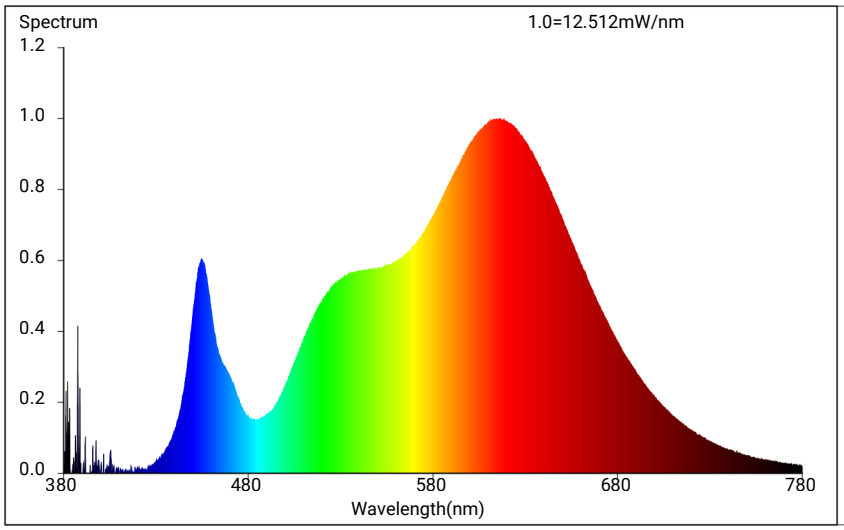

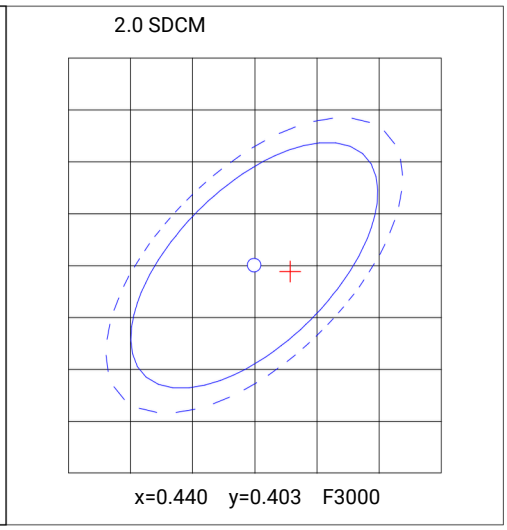

Colorimetric Parameters

Chromaticity x	Chromaticity y	Chromaticity u'	Chromaticity v'	Duv	CCT	Ld	Purity	Peak Wavelength (Lp)
0.4429	0.4024	0.2551	0.5216	-0.0015	3000 K	583.8 nm	53.7%	616 nm

FWHM	Red Ratio	Green Ratio	Blue Ratio	Ra	CRI	TM-30 Rf	TM-30 Rg
145.9 nm	25.4%	72.3%	2.3%	91.5	89.4	88	101

R1	R2	R3	R4	R5	R6	R7	R8
93	96	96	93	92	95	90	77

R9	R10	R11	R12	R13	R14	R15	TLCI
48	88	94	75	94	97	87	90.3

Photometric & Radiometric Parameters

Flux	Eff.	Fe	EQE	Kred
580.1 lm	97.88 lm/W	1.908 W	237.06%	0.18115

Electrical Parameters

V	I	P	PF	Freq
24V	0.2470 A	5.927 W	1.000	0.00 Hz

MicroSeries

24V, 5mm, Cut any Length COB LED Tape

Recommended Channels

Surface Mount



SL-103-S-94
Aluminium Finish
Width (outside): 0.59" (14.90mm)
Width (inside): 0.50" (12.70mm)
Height: 0.27" (6.86mm)
Length: 94" (2.38m)




SL-118-S-94
Aluminium Finish
Width (outside): 0.66" (16.70mm)
Width (inside): 0.48" (12.30mm)
Height: 0.31" (8.00mm)
Length: 94" (2.38m)




SL-118-B-94
Black Finish
Width (outside): 0.66" (16.70mm)
Width (inside): 0.48" (12.30mm)
Height: 0.31" (8.00mm)
Length: 94" (2.38m)




SL-118-BB-94
Black Finish
Width (outside): 0.66" (16.70mm)
Width (inside): 0.48" (12.30mm)
Height: 0.31" (8.00mm)
Length: 94" (2.38m)




SL-179-S-94
Aluminium Finish
Width (outside): 0.66" (16.70mm)
Width (inside): 0.48" (12.30mm)
Height: 0.60" (15.30mm)
Length: 94" (2.38m)




SL-179-B-94
Black Finish
Width (outside): 0.66" (16.70mm)
Width (inside): 0.48" (12.30mm)
Height: 0.60" (15.30mm)
Length: 94" (2.38m)




SL-179-BB-94
Black Finish
Width (outside): 0.66" (16.70mm)
Width (inside): 0.48" (12.30mm)
Height: 0.60" (15.30mm)
Length: 94" (2.38m)



SL-430-S-94
Aluminium Finish
Width (outside): 0.93" (23.50mm)
Width (inside): 0.80" (20.30mm)
Height: 0.50" (12.80mm)
Length: 94" (2.38m)




SL-454-S-94
Aluminium Finish
Width (outside): 0.93" (23.50mm)
Width (inside): 0.80" (20.30mm)
Height: 0.39" (12.80mm)
Length: 94" (2.38m)



SL-454-B-94
Aluminium Finish
Width (outside): 0.93" (23.50mm)
Width (inside): 0.80" (20.30mm)
Height: 0.39" (12.80mm)
Length: 94" (2.38m)




SL-314-S-94
Aluminium Finish
Width (outside): 0.80" (20.30mm)
Width (inside): 0.68" (17.50mm)
Height: 0.80" (20.30mm)
Length: 94" (2.38m)




SL-331-S-94
Aluminium Finish
Width (outside): 1.14 (29.00mm)
Width (inside): 0.68" (17.50mm)
Height: 0.88" (22.35mm)
Length: 0.94" (2.44mm)




SL-504-S-94
Aluminium Finish
Width (outside): 1.31" (33.20mm)
Width (inside): 1.18" (30.00mm)
Height: 0.57" (14.40mm)
Length: 94" (2.38m)




SL-977-S-94
Aluminium Finish
Width (outside): 3.97" (100.90mm)
Width (inside): 3.60" (91.50mm)
Height: 1.48" (37.50mm)
Length: 94" (2.38m)



SL-998-S-94
Aluminium Finish
Width (outside): 3.37" (85.50mm)
Width (inside): 3.00"(76.20mm)
Height: 1.43" (36.20mm)
Length: 94" (2.38m)




SL-910-S-94
Aluminium Finish
Width (outside): 1.44" (36.70mm)
Width (inside): 1.18" (30.00mm)
Height: 1.44" (36.70mm)
Length: 94" (2.38m)



SL-910-B-94
Black Finish
Width (outside): 1.44" (36.70mm)
Width (inside): 1.18" (30.00mm)
Height: 1.44" (36.70mm)
Length: 94" (2.38m)



SL-928-S-94
Aluminium Finish
Width (outside): 1.97" (50.00mm)
Width (inside): 1.80" (45.72mm)
Height: 1.16" (29.50mm)
Length: 94" (2.38m)



SL-928-B-94
Black Finish
Width (outside): 1.97" (50.00mm)
Width (inside): 1.80" (45.72mm)
Height: 1.16" (29.50mm)
Length: 94" (2.38m)


Corner LED Channel



SL-214-S-94
Aluminium Finish
Width (outside): 0.64" (16.30mm)
Width (inside): 0.44" (11.00mm)
Height: 0.64" (16.30mm)
Length: 94" (2.38m)



SL-267-S-94
Aluminium Finish
Width (outside): 0.69" (17.70mm)
Width (inside): 0.47" (12.10mm)
Height: 0.69" (17.70mm)
Length: 94" (2.38m)



SL-511-S-94
Aluminium Finish
Width (outside): 1.18" (30mm)
Width (inside): 0.83" (21mm)
Height: 1.18" (30mm)
Length: 94" (2.38m)

MicroSeries

24V, 5mm, Cut any Length COB LED Tape

Recommended Channels

Recessed Mount




RL-601-S-94
Aluminium Finish
Width (outside): 0.91" (23.00mm)
Width (inside): 0.48" (12.30mm)
Height: 0.31" (8.00mm)
Length: 94" (2.38m)



RL-601-B-94
Aluminium Finish
Width (outside): 0.91" (23.00mm)
Width (inside): 0.48" (12.30mm)
Height: 0.31" (8.00mm)
Length: 94" (2.38m)



RL-601-BB-94
Aluminium Finish
Width (outside): 0.91" (23.00mm)
Width (inside): 0.48" (12.30mm)
Height: 0.31" (8.00mm)
Length: 94" (2.38m)




RL-615-S-94
Aluminium Finish
Width (outside): 0.91 (23.00mm)
Width (inside): 0.48" (12.30mm)
Height: 0.57" (14.50mm)
Length: 94" (2.38m)




RL-727-S-94
Aluminium Finish
Width (outside): 1.20" (30.60mm)
Width (inside): 0.80" (20.30mm)
Height: 0.50" (12.80mm)
Length: 94" (2.38m)




RL-778-S-94
Aluminium Finish
Width (outside): 1.31" (33.20mm)
Width (inside): 1.18" (30.00mm)
Height: 0.57" (14.40mm)
Length: 94" (2.38m)




RL-809-S-94
Aluminum Finish
Width (outside): 1.43" (36.30mm)
Width (inside): 1.30" (33.10mm)
Height: 1.38" (35.00mm)
Length: 94" (2.38m)



RL-851-S-94
Aluminum Finish
Width (outside): 2.52" (64.00mm)
Width (inside): 1.57" (40.00mm)
Height: 1.16" (29.50mm)
Length: 94" (2.38m)



RL-977-S-94
Aluminum Finish
Width (outside): 4.44" (112.8mm)
Width (inside): 3.60" (91.50mm)
Height: 1.48" (37.50mm)
Length: 94" (2.38m)



RL-873-S-94
Aluminum Finish
Width (outside): 3.83" (97.40mm)
Width (inside): 3.00" (76.20mm)
Height: 1.43" (36.40mm)
Length: 94" (2.38m)

Trimless Mud-In



TL-029-S-94
Aluminium Finish
Width (outside): 0.66" (16.70mm)
Width (inside): 0.48" (12.30mm)
Height: 0.61" (15.50mm)
Length: 94" (2.38m)




TL-041-S-94
Aluminium Finish
Width (outside): 0.93" (23.50mm)
Width (inside): 0.80" (20.50mm)
Height: 0.61" (15.50mm)
Length: 94" (2.38m)



TL-066-S-94
Aluminium Finish
Width (outside): 1.44" (36.70mm)
Width (inside): 1.18" (30.00mm)
Height: 0.61" (15.50mm)
Length: 94" (2.38m)



TL-071-S-94
Aluminium Finish
Width (outside): 1.97" (50.00mm)
Width (inside): 1.77" (45.00mm)
Height: 0.61" (15.50mm)
Length: 94" (2.38m)



TL-301-S-94
Aluminium Finish
Width (outside): 0.61" (15.50mm)
Width (inside): 0.48" (12.30mm)
Height: 4.68" (119mm)
Length: 94" (2.38m)



TL-401-S-94
Aluminium Finish
Width (outside): 0.73" (18.50mm)
Width (inside): 0.48" (12.30mm)
Height: 3.80" (96.50mm)
Length: 94" (2.38m)



TL-539-S-94
Aluminium Finish
Width (outside): 1.70" (43.30mm)
Width (inside): 0.59" (15mm)
Height: 3.94" (100.2mm)
Length: 94" (2.38m)

MicroSeries

24V, 5mm, Cut any Length COB LED Tape

Recommended 24V LED Drivers

Dimmable

XRD Series - Phase Cut Dimmable with Built-In J-box



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
XRD-40W-24VDC	120VAC	24VDC	40W	Yes	IP21	6.20" x 1.85" x 1.35"
XRD-60W-24VDC	120VAC	24VDC	60W	Yes	IP21	6.20" x 1.85" x 1.35"
XRD-75W-24VDC	120VAC	24VDC	75W	Yes	IP21	6.20" x 1.85" x 1.35"
XRD-96W-24VDC	120VAC	24VDC	96W	Yes	IP21	6.20" x 1.85" x 1.35"

MX1 Series - High Power, Phase Cut Dimmable



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
MX1-150W-24VDC	120VAC	24VDC	150W	Yes	IP65	6.57" x 3.85" x 1.64"
MX1-200W-24VDC	120VAC	24VDC	200W	Yes	IP65	6.57" x 3.85" x 1.64"
MX1-300W-24VDC	120VAC	24VDC	300W	Yes	IP65	6.57" x 3.85" x 1.64"

MX2 Series - Multi Output, Class 2, Phase Cut Dimmable



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
MX2-192W-24VDC	120VAC	24VDC	96W x 2	Yes	IP65	7.79" x 3.22" x 1.64"
MX2-288W-24VDC	120VAC	24VDC	96W x 3	Yes	IP65	10.98" x 3.22" x 1.64"

MRD Series - Phase Cut Dimmable Series



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
MRD-40W-24VDC	120VAC	24VDC	40W	Yes	IP21	3.31" x 1.57" x 0.98"
MRD-60W-24VDC	120VAC	24VDC	60W	Yes	IP21	3.31" x 1.57" x 0.98"
MRD-75W-24VDC	120VAC	24VDC	75W	Yes	IP21	3.31" x 1.57" x 0.98"
MRD-96W-24VDC	120VAC	24VDC	96W	Yes	IP21	3.31" x 1.57" x 0.98"

ProDrive Series - Low Profile Universal 5-in-1 Dimmable Series



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
ProDrive-40W-24DC	120-277VAC	24VDC	40W	Yes	IP21	6.29" x 2.28" x 0.78"
ProDrive-60W-24DC	120-277VAC	24VDC	60W	Yes	IP21	7.28" x 2.5" x 0.86"
ProDrive-96W-24DC	120-277VAC	24VDC	96W	Yes	IP21	7.28" x 2.5" x 0.86"

JPro Series - Universal 5-in-1 Dimmable Series



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
JPro-96W-24VDC	120-277VAC	24VDC	96W	Yes	IP65	8.91" x 4.62" x 1.67"
JPro-200W-24VDC	120-277VAC	24VDC	200W	No	IP65	10" x 5.19" x 1.67"
JPro-300W-24VDC	120-277VAC	24VDC	300W	No	IP65	11.37" x 5.19" x 1.92"

NanoDrive Series - 0-10V Dimmable



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
NANO-40W-24VDC	120-277VAC	24VDC	40W	Yes	IP65	1.97" x 1.45" x 8.77"
NANO-60W-24VDC	120-277VAC	24VDC	60W	Yes	IP65	1.97" x 1.45" x 8.77"
NANO-96W-24VDC	120-277VAC	24VDC	96W	Yes	IP65	1.97" x 1.45" x 8.77"

MicroSeries

24V, 5mm, Cut any Length COB LED Tape

Recommended 24V LED Drivers

Driver & Dimmer Switch


EnoDim Series - Driver & Dimmer Switch



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
EnoDim-96-24-D-W	120VAC	24VDC	96W	No	IP20	4.134" x 2.126" x 1.996"
EnoDim-160-24-D-W	120VAC	24VDC	160W	No	IP20	4.134" x 2.126" x 2.047"


Non-Dimmable

ELD - IP65 Non-Dim Series - Plug-in Version



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
ELD-100W-24VDC-UL-PLUG	120VAC	24VDC	100W	Yes	IP65	8" x 2.4" x 0.78"
ELD-200W-24VDC-UL-PLUG	120VAC	24VDC	200W	Yes	IP65	9.3" x 2.48" x 1.25"
ELD-300W-24VDC-UL-PLUG	120VAC	24VDC	300W	Yes	IP65	8.97" x 2.83" x 1.25"

ELD - IP65 Non-Dim Series - Direct Wire Version



Ordering Code	Input Voltage	Output Voltage	Max Load	Class	Environment	Dimensions
ELD-100W-24VDC-UL	120VAC	24VDC	100W	Yes	IP65	8" x 2.4" x 0.78"
ELD-200W-24VDC-UL	120VAC	24VDC	200W	Yes	IP65	9.3" x 2.48" x 1.25"
ELD-300W-24VDC-UL	120VAC	24VDC	300W	Yes	IP65	8.97" x 2.83" x 1.25"


MicroSeries


24V, 5mm, Cut any Length COB LED Tape

Recommended Connectors

5mm Tape to Tape Connector


P/N: ENO-SC-TT-5-P5




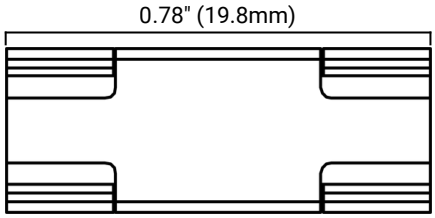

5mm Tape to Wire Connector


P/N: ENO-SC-TW-5-P5




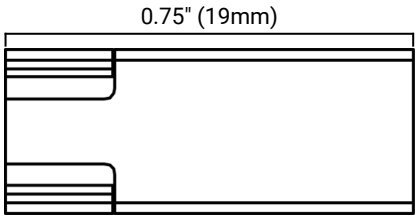

5mm Tape to Wire Connector with 72” Power Feed


P/N: ENO-SC-TW-72W-5




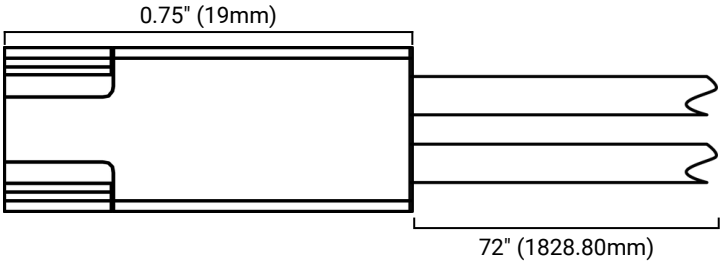

5mm Tape to Tape L Shape 90° Connector

P/N: ENO-SC-LL-5-P5

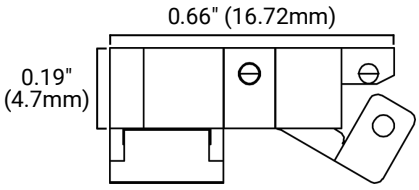

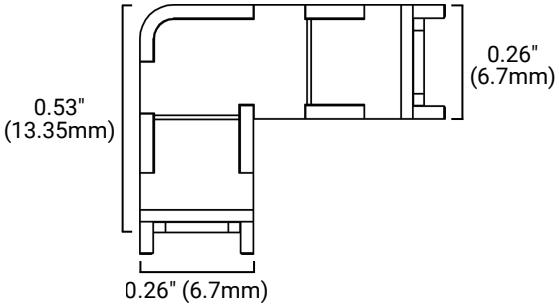

Ver. 102726